



BLILEY ELECTRIC COMPANY

2545 We Grandview Blvd
Erie, PA 16506

Phone: (814) 838-3571
FAX (814) 833 2712

Web: www.bliley.com
E Mail: info@bliley.com

This is our interpretation of your specification. If this does not meet your requirements in any way, please contact us as soon as possible.

BECO P/N: NV26R891

- Frequency: 100 MHz
- Output: +3 dBm min into 50 Ω
+7 dBm typical
- Harmonics: -25 dBc min
- Spurious: -60 dBc min
- Operating Temp Range: -40°C to +65°C
- Temp Stability and Aging: ± 5.0 ppm max for 17 years
± 5 x 10⁻⁷ typical for temp stability
- Supply Voltage: +12 Vdc ± 5 %
- Current: 350 mA max at turn-on
- Power consumption: 4.2 Watts max at turn-on
1.2 Watts typical stabilized at +25°C
- Voltage Control: ± 3 x 10⁻⁶ typical for 0 to +5 volts Negative Slope
- Phase Noise:
 - 115 dBc 100 Hz
 - 139 dBc 1 KHz
 - 151 dBc 10 KHz
 - 154 dBc 100 KHz
- Case Size: Per attached outline drawing


Date	Rev.	Revised per	Initials
4-14-99	A	Output was 0 dBm min into 50Ω +7 DBm typical; Voltage Ctrl. was ±3 x 10 ⁻⁷ typical for 0 to +5 volts Neg. Slope; BECO P/N was NV26R	DRS

	Initials	Date
Mechanical Eng:	J. Morell	1-7-99
Design Eng:	D. Smith	1-7-99
Release Date: 1-7-99		

Specification No.	Revision	Sheet #
6092	A	1 of 2

UNCONTROLLED -- ISSUED February 7, 2001

USER OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THEY ARE USING THE CORRECT REVISION LEVEL

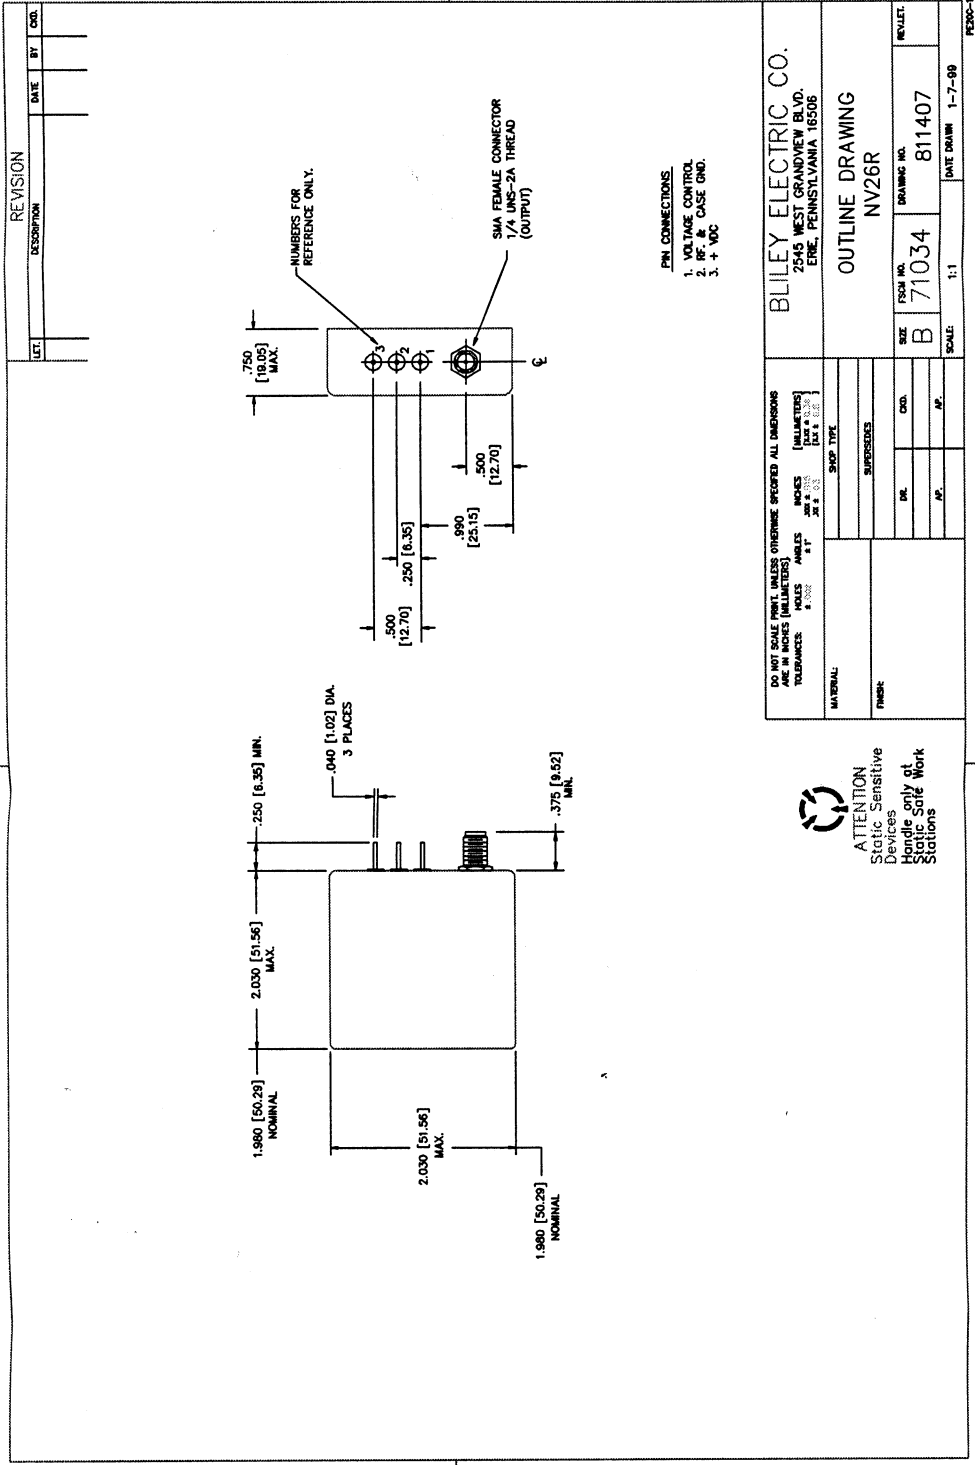

NOT TO SCALE

Specification No.	Revision	Sheet #
6092	A	2 of 2

UNCONTROLLED -- ISSUED February 7, 2001

USER OF THIS DOCUMENT IS RESPONSIBLE FOR ENSURING THEY ARE USING THE CORRECT REVISION LEVEL

THE CORRECT REVISION LEVEL